German, Italian and Latin American consortium for resource efficient logistics hubs & transport

Emission intensity factors for logistics hubs

by Kerstin Schubert (formerly Dobers, Fraunhofer IML)[1], Sara Perotti (Politecnico di Milano) and Andrea Fossa (GreenRouter) – updated/extended results (10/2026) –

To overcome the data gap on operational greenhouse gas (GHG) emissions of logistics hubs, the international partners of the GILA project[1] – Fraunhofer IML, Politecnico di Milano and GreenRouter – organize market studies on an annual basis to regularly update and continuously improve their initial data base on GHG emission intensity values of logistics hubs.

Furthermore, a market study with the focus on intermodal terminals has been launched by EcoTransIT World in 2025, conducted and updated by SGKV and Fraunhofer IML in 2026. As a result of this collaboration and previous work, an expanded and updated set of default emission intensity values for a more disaggregated range of logistics hubs has been produced.

This document summarizes the approach and outcomes of the market studies in consecutive years (2020-2026)[2, 3] with the focus on logistics sites offering storage and/or transhipment as well as terminals.

Data collected by each institution were processed, anonymised and finally merged into one database that allowed to elaborate the collected information. The method adopted for the first 2021 market study was replicated and further refined for the later editions. Today, all sites have been transferred to one anonymised consolidated database, and in case a site participated in multiple surveys, the latest relevant dataset has been used for establishing the results described in the following.

As a result, the GILA database covers 957 logistics real estates and 167 terminals, in total 1,124 logistics hubs from 153 companies and 52 countries worldwide, 81% of them located in Europe. Their operators have provided annual information on energy consumption, refill of refrigerants, as well as throughput and logistical area indoors. The assessment scope used for calculating average emission intensity values is in accordance with the "Guide for Greenhouse Gas Emissions Accounting at Logistics Hubs"[4] and considers requirements of the ISO 14083[5]. As shown in the following process chart, the collected data was validated as regards to completeness and outliers; a detailed verification

[1] Project information available at https://www.iml.fraunhofer.de/en/fields_of_activity/logistics--traffic--environment/sustainability-and-circular-economy/project-gila.html

[2] Dobers, K.; Fossa, A.; Perotti, S.; Jarmer, J.P.: Energy efficiency and GHG emission intensity values for logistics sites. GILA webinar. 02.02.2023. https://reff.iml.fraunhofer.de/


[3] Dobers, K.; Fossa, A.; Perotti, S.; Jarmer, J.P.: Energy efficiency and GHG emission intensity values for logistics sites. GILA webinar. 03.02.2022.

[4] Dobers, K., Jarmer, J.-P.: Guide for Greenhouse Gas Emissions Accounting at Logistics Hubs. version 2. doi:10.24406/publica-2261. 2023

[5] ISO 14083:2023. Greenhouse gases – Quantification and reporting of greenhouse gas emissions arising from transport chain operations. https://www.iso.org/standard/78864.html

[1] Contact: Dr. Kerstin Schubert, Fraunhofer Institute for Material Flow and Logistics IML (Germany), kerstin.schuberts@iml.fraunhofer.de

of each individual site is not included. For the elaboration of average GHG KPIs, only sites establishing a total carbon footprint calculation were considered.

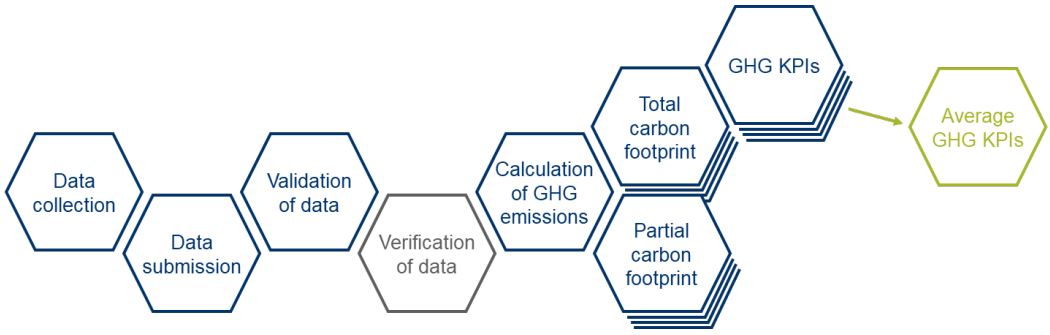

Due to varying data availability and quality (e.g. completeness of consumption data according to assessment scope, provision of base units throughput and size), a reduced number of 663 hubs has been used to calculate tonne-based emission intensity values per hub type (738 hubs for m² based emission intensity values). This database differentiates four hub types, i.e.

(1) Hubs where transhipment is the main service (>80 % of goods handled),
(2) Hubs where both transhipment and warehousing are relevant services,
(3) Hubs where warehousing is the main service (>80 % of goods handled),
(4) Intermodal terminals, and
(5) Liquid bulk terminals.

As an additional categorization, the hub conditions have been used by differentiation between ambient, chilled, frozen, or mixed temperature hubs. The hub sizes vary

- from a few tonnes to more than 1 million tonnes outbound, with around 60 000 tonnes as median value for real estates, and
- 250 tonnes to 23 million tonnes with a median value of 660,000 tonnes for liquid bulk terminals and
- 60,000 to 87 million tonnes with a median value of 5.3 million tonnes for intermodal terminals.

15% of the operators specified that they use a hub-specific electricity mix. However, only an average national emission factor was used for calculating the average emission intensity value as specified in the table below. Natural gas is the main heating energy source, some real estates use district heating; liquid bulk terminals also use steam for heating purposes. Energy sources for non-electrified material handling are mainly diesel or LPG, additionally propane in real estates or LNG in terminals. The refrigerant types R-410A, R-717 and R-404A are the most frequently used ones as specified by the participating sites.

The following tables summarize the results of average GHG emission intensity values of the sample size, allocated to one of the defined hub types. The relevant sample size per hub type is outlined in brackets.

Logistics hub emission intensity values for different types (tonne-based)

Hub type unit	Ambient	sample size	Temperature-controlled	sample size	Mixed	sample size
Transhipment kg CO_2e / t	1.2	(172)			2.7	(17)
Storage + transhipment kg CO_2e / t	3.6	(173)			4.0	(49)
Warehouse kg CO_2e / t	35.5	(92)			≥50.0	estimate
Liquid bulk terminal kg CO_2e / t	3.3	(26)			8.9	(35)
Intermodal terminal (inland & sea port) kg CO_2e/container	18.2	(84)	21.4	(84)		

Logistics hub emission intensity values for different types (square meter-based)

[kg CO_2e / m²/a]	**Ambient**		**Mixed**	
Transhipment	18.4	(186)	26.4	(17)
Storage + transhipment	21.2	(239)	42.8	(70)
Warehouse	23.6	(168)	36.5	(21)

The sample size that these values are based on has increased over time but is however still too small for more granular values; the values will continue to be updated over time assuming that more and better data becomes available and is shared with us. We expect this to improve accuracy and to broaden the range of defaults offered. As is the case for all default values, the data provided in the tables should be used as a last resort when primary data is not available, or as a starting point that can lead on to future calculations based on primary data.

In spring **2027** there will be the **next market study** for extending the sample size. Interested companies can participate in the future market studies by using the REff Tool® or as participant in the Osservatorio Contract Logistics "Gino Marchet" of Politecnico di Milano. A consolidated analysis and elaboration of annually updated KPIs is planned, which combines all data sets from the international market studies performed until then.

For participating in this work, please contact us!
Updates are published on https://reff.iml.fraunhofer.de/.

Suggested citation: Schubert, Perotti, Fossa: Emission intensity factors for logistics hubs. updated October 2026, online available at https://reff.iml.fhg.de/.

Data requirements for participating in annual market study

Data collection of the market study is realised by using e.g. the REff Tool®. Here, each company receives its own database, so that confidentiality is guaranteed.

Information required for participation covers the following:

- Specification of hub (name, location, country)
- Classification of hub (warehouse, transhipment, storage & transhipment, terminal types: intermodal, liquid bulk, dry bulk, roll on/roll off)
- Temperature requirement(s) (ambient, chilled, frozen, heated, mixed)
- Reporting year (12 months)
- Annual consumption of resources:
    - Electricity,
    - Heating energy (e.g., natural gas, biogas, heating oil, district heating, LPG, geothermal energy, wood chips, wood pellets, stream, diesel),
    - Other energy used for e.g., material handling (diesel, biodiesel, petrol, ethanol, LPG, LNG, CNG, hydrogen)
    - Refrigerants
- Annual throughput.

This information is needed to realise the quantification of greenhouse gas emissions and emission intensity values as required by the ISO 14083:2023.

We also ask for additional information (e.g. size of logistics buildings), so that we can analyse and classify participating hubs in more detail.

Please support this research by

- Participating with your own hubs (one or more hubs),
- Involving your sub-contractors in these activities.